

## N-Male for RG 59

### N-C-75J59

### 75Ω

#### Application:

Straight N Male connector for RG 59 coaxial cables.

#### Specifications:


Temperature range:	-40 to +125 [°C]
Insulation resistance:	≥ 5000 [MΩ]
Frequency range DC:	≈ 2,5 [GHz]
Impedance:	75 [Ω]
VSWR at 2,5GHz:	≤1,15
Voltage:	1000 [V max]
Testvoltage	1500 [V max]
Durability:	≥ 500 [Cycles]

#### Norms:

Salt spray test:	Neutral salt spray 96H
Waterproof:	IP 68

#### Construction:

<i>Center contact:</i>	Brass bar (Cu/Ep Ag)
<i>Body:</i>	Brass bar (Cu/Ep Cu Sn Zn)
<i>Insulation:</i>	PFA/PTFE
<i>Connectingsleeve:</i>	Brass bar (Cu/Ep Cu Sn Zn)
<i>Snap ring:</i>	Bronze wire
<i>O-ring:</i>	Silastic
<i>Crimping sleeve:</i>	Red copper (Cu/Ep Ni)
<i>Heat shrinkable tube:</i>	Black PE

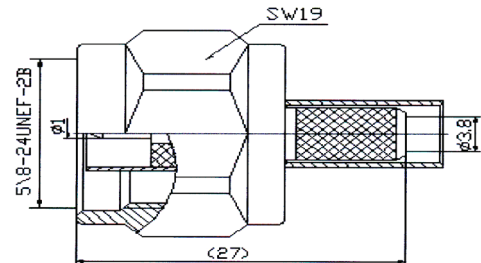

Prod.no: 65453

**RoHS** ✓